


## Technical Datasheet

### optibelt ELASTOMIT-R 1403038A (leaded) X-RAY protection sheet with fabric in the center (PA fabric)



Status 08/2019

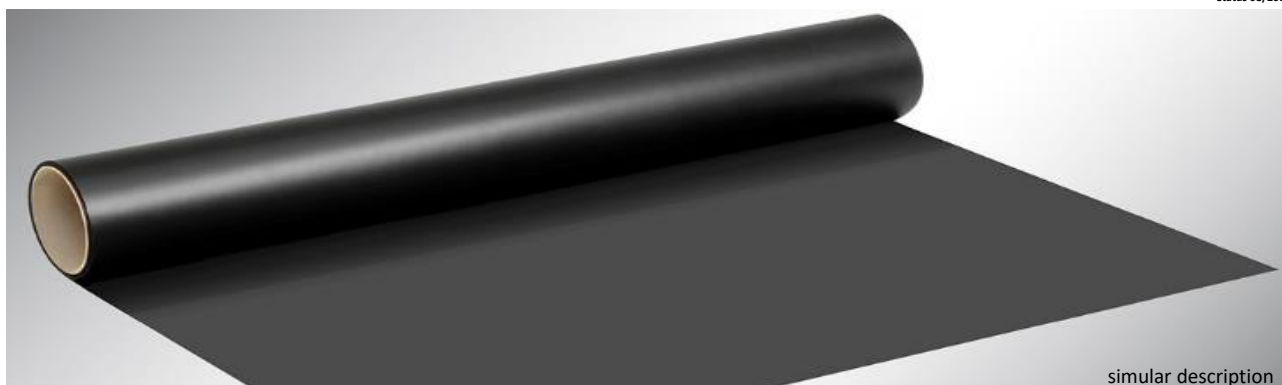

similar description

PRODUCT SPECIFICATION		NOTE
Matrix	Rubber	
Colour	black	
Surface finish	abrasion-resistant rubber coating on both sides	
Lead equivalent	0,35 mm/ Pb $\pm$ 10 %	according to DIN 61331-1 (60 kV - 150 kV)
Weight	min. 6000 g/m <sup>2</sup>	
Tensile strength (min.) (longitudinal and lateral)	1200 N/50 mm and 1400 N/50 mm	
Temperature resistance	- 40°C to + 70°C	

ADDITIONAL INFORMATION	
Version <b>A</b>	This Design is manufactured from calandered high-grade Auma goods that have a glossy surface on the one side and a matt surface on the other one. Vulcanized by OPTIBELT rotational process.
Characteristics	The lead equivalent corresponds to a physical thickness of 2,20 mm - 2,55 mm. Only high-class rubber types are used for this product with an excellent flexibility, good dynamic load and high abrasion resistance. Additional a special surface finish (design "C" halogenated) is available.
Delivery form	Available as sheeting with a standard effective width of 1200 mm wound up on cardboard tubes. The sheeting can also be delivered in strips with a width starting from 40 mm.
Application	This X-ray protection sheet is specially designed for the shielding of X-rays in X-ray protection systems which are used for cargo and luggage. Both sides are covered with a lead-free abrasion resistant rubber.
Handling and Storage	See guidelines for the storing and handling of X-ray protection sheets <a href="http://www.optibelt.com/elastomer-solutions/service/downloads.html">www.optibelt.com/elastomer-solutions/service/downloads.html</a>

The information provided in this product information sheet is the result of many years of experience. The contents are aimed exclusively at entrepreneurs and not at consumers. The contents do not constitute a proposal for the conclusion of a contract. They are regarded as non-binding information and do not represent warranties of certain characteristics and/or guarantees by OPTIBELT. They do not exempt the user of OPTIBELT products from carrying out a comprehensive examination of the products delivered by OPTIBELT for their suitability for the intended purpose before use.

If materials are used in combination with acids, alkalis and other chemicals, information about the concentration and possible effects of temperature is necessary. In case of doubt, the use of OPTIBELT products must be agreed with OPTIBELT before their use, particularly if they are used under conditions that present a particular risk to health, safety or the environment or which require a more demanding use. OPTIBELT expressly reserves the right to make changes and additions, for example on the basis of technical innovations.

The General Terms and Conditions of Sale of OPTIBELT Elastomer Solutions GmbH, Hötter/Germany, shall apply exclusively, especially the retention of title set out therein, including in its expanded and extended form. These may be requested free of charge and are available at [www.optibelt.de](http://www.optibelt.de). The customer agrees to the validity of the General Terms and Conditions of OPTIBELT. OPTIBELT rejects the validity of the general terms and conditions of the customer if individual provisions are not consistent with the OPTIBELT General Terms and Conditions.

We would be happy to advise you about the product characteristics and adjustments if you have particular requirements. Please also note the information in the OPTIBELT documentation. Errors excepted, subject to technical change without notice. [www.optibelt.com](http://www.optibelt.com), © OPTIBELT Elastomer Solutions GmbH

OPTIBELT Elastomer Solutions GmbH  
Conveyer Allee 15 • D 37671 Hötter  
phone +49 (0) 5271 62 - 1 • fax +49 (0) 5271 62 00  
E-Mail: [info@optibelt.com](mailto:info@optibelt.com) • Internet: [www.optibelt.com](http://www.optibelt.com)